


USB Classic 200 ND TOP SK

QUICK OVERVIEW: STRENGTHS

Waterproofing and breathability beyond any perforation

- Highly breathable, watertight membrane
- Optimized performance, guaranteed for 20 years
- Certified with European Technical Assessment No. ETA-25/1126 for timber substrates
- Reduction of accessories and optimization of installation time

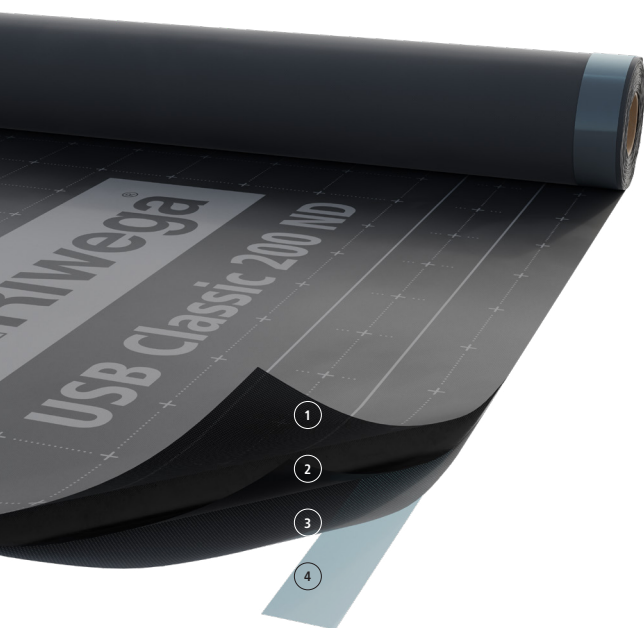

Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② TPU functional film
- ③ Protective layer in PP with integrated adhesive strip
- ④ Silicone liner

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m²)
-	02020220	1,5	50	1500

Features:



Classification:



Technical data sheet

Mass per unit area	EN 1849-2	200 g/m²
Thickness		1,00 mm
S _d value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m²/24 h
Water column	EN 20811	>400 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	380 / 240 N/50mm
Elongation MD/CD*	EN 12311-1	45 / 60 %
Tear resistance MD/CD*	EN 12310-1	230 / 270 N
Fire reaction class	EN 13501-1	E
Maximum UV exposure period**		32 weeks
Temporary weather protection***	ZVDH	8 weeks
Temperature resistance		-40°C / +100°C

*MD = longitudinal CD = transversal

**based on Central European climate conditions

***proper installation in accordance with applicable standards and instructions
Riwega Srl is not responsible for negligent and improper use of its products