
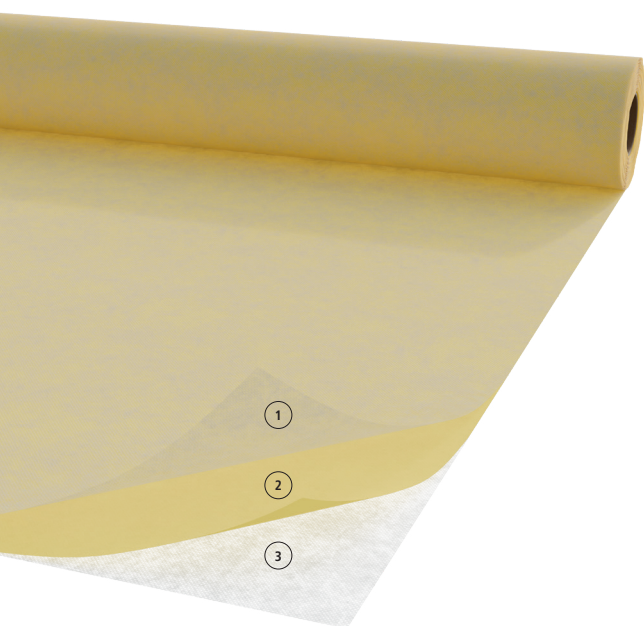


Wetness Stop Interior 300

QUICK OVERVIEW: STRENGTHS

High performance, flawless installation

- Waterproofing membrane for moist environments
- Anti-breakage and alkali-resistant system
- Non-woven fabric on both sides; ideal with cementitious tile adhesives
- Quick and easy to install
- Minimizes installation mistakes

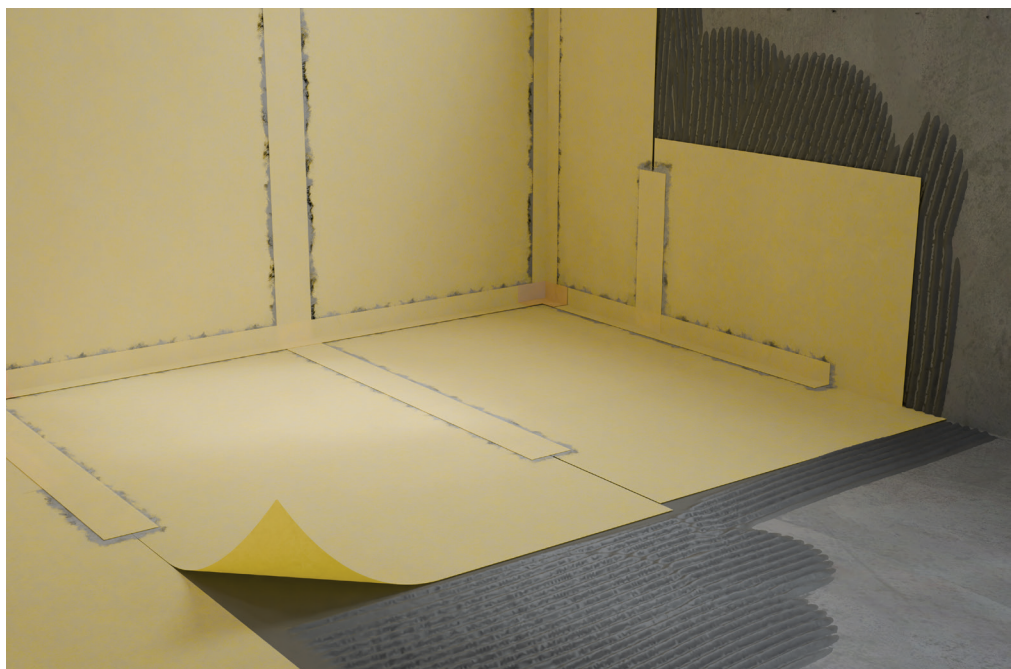

Composition:

- ① Upper PP non-woven fabric
- ② PE film
- ③ Lower PP non-woven fabric

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02204000	-	1	30	1200

Features:



Certification:



Technical data sheet

Mass per unit area	EN 1849-2	300 g/m ²
Thickness	EN 1849-2	0,6 mm
S _d value	EN 1931	70 m
Resistance to water passage	EN 1928 (Met. B)	>1,5 bar
Water exposure class compliance	DIN 18534	W0-I, W1-I, W2-I, W3-I
	DIN 18535	W1-B
	DIN 18531	A, B, C
Tensile strength MD/CD*	EN ISO 527-3	150 / 80 N/25mm
Elongation MD/CD*	EN ISO 527-3	120 / 120 %
Adhesion strength	EN 14891	≥0,2 N/mm ²
Dimensional stability		<±1 %
Fire reaction class	EN 13501-1	E
Emissions	EMICODE®	very low
Working temperature		+5°C / +40°C
Temperature resistance		-30°C / +80°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products