

# DB 135


36

R2

## QUICK OVERVIEW: STRENGTHS

### Easy and effective choice with low grammage

- Vapour control layer
- Regulates the passage of vapour and guarantees a perfect wind-tight building envelope
- Ideal as an inner cladding of the installed insulating material between wall and ceiling
- Easy and quick to install thanks to its lightweight

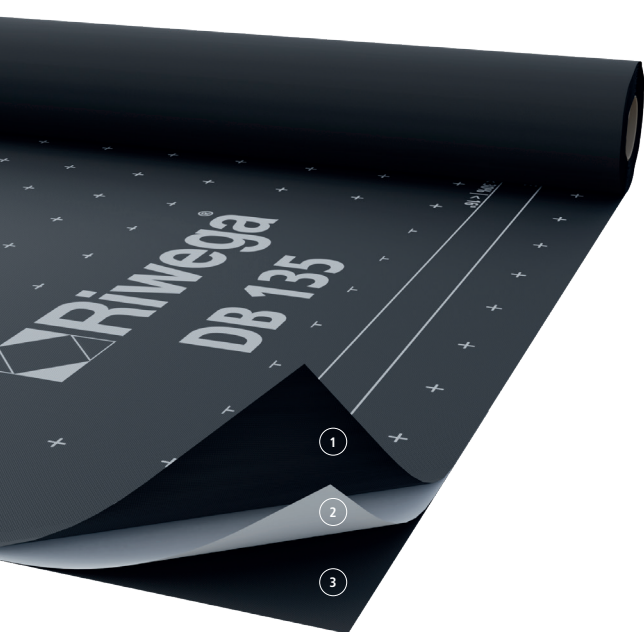

### Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Functional film in PP, impermeabile e leggermente traspirante
- ③ Protective layer in PP

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02030135	-	1,5	50	2250

### Features:



### Classification:



### Technical data sheet

Material	PP,PP,PP	
Film	PP	
Colour	Black	
Mass per unit area	EN 1849-2	140 g/m <sup>2</sup>
Thickness		0,30 mm
Sd value	EN ISO 12572	20 m
Water vapour permeability	EN ISO 12572	~ 1,5 g/m <sup>2</sup> /24 h
Water column	EN 20811	>200 cm
Water tightness	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	250 / 180 N/50mm
Elongation MD/CD*	EN 12311-1	50 / 50 %
Tear resistance MD/CD*	EN 12310-1	65 / 65 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products