

Tape ICE



04
R3

QUICK OVERVIEW: STRENGTHS

Low temperature – high adhesion

- Single-sided acrylic tape
- The adhesive layer guarantees an immediate grip down to -20°C
- Next-generation acrylic glue, high adhesion, solvent-free
- Dual use, internal and exterior, thanks to the waterproof surface
- Good UV and ageing resistance

Features:




Classification:



Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		LDPE film
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,26 - 0,28 mm
Sd value		~11 m
Tear resistance with elasticity	DIN EN 14410	≥25 N/25 mm; 50 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Emissions	EMICODE®	EC1 ^{PLUS}
Working temperature		+5°C / +30°C lavorabile from -20°C
Temperature resistance		-30°C / +100°C
UV stability		24 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

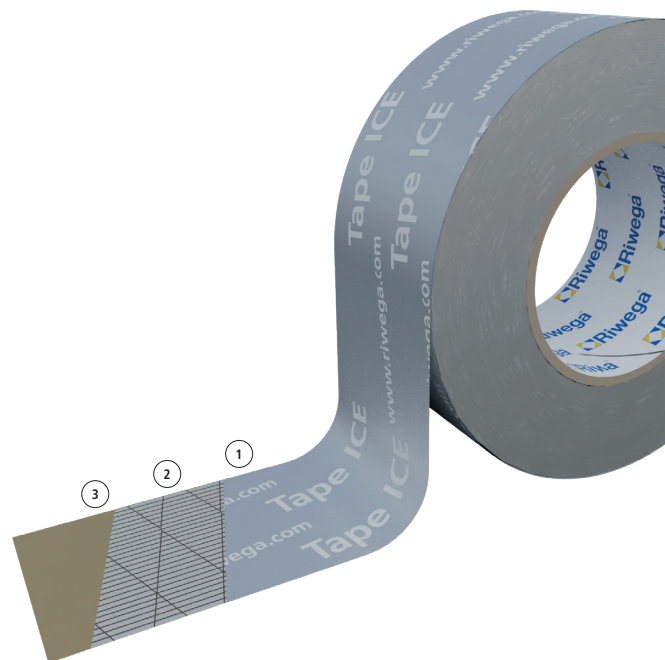

Composition:

- Polypropylene (1)
- Acrylic glue with PET reinforcing (2)
- Silicone liner (3)

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape ICE	02040165	60x25	10	80

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products